

## CC-120-1000

Inverter for driving ultra-high-speed turbo compressors in fuel cell systems.

- Sensorless speed control from 5,000 rpm up to 500,000 rpm
- Auxiliary voltage supply (8 – 32 VDC) for start up of the turbo compressor from battery, automatic switch to high voltage input
- Operation of the compressor from wide input voltage range (40 – 120 VDC)
- Rated output power: 1,000 W
- Protection class IP67
- 94% efficiency
- Integrated break chopper
- Connection to active and passive cooling (water or air) possible



Specifications inverter	
Input voltage $U_{in}$ (DC) <sup>1</sup>	40 – 120 V
Input voltage auxiliary supply $U_{in}$ (DC)	8 – 32 V
Rated output power	1,000 W
Output voltage (peak value phase-phase)	0 – 100 V
Maximum phase current (PAM-operation)	8.5 Arms/12 Apeak <sup>2</sup>
Maximum frequency/speed (PAM-operation)	8.3 kHz/500,000 rpm
Communication interface	CAN, RS485 <sup>3</sup>
Weight (incl. housing)	1.4 kg
Dimensions (L x W x H)	172 x 138 x 55.5 mm

### User interfaces (X1, X2)

Connector X1 – In-/output (14 Pin) – CO1 version	
3 x CAN interface	CanH, CanL, CanGND
2 x Serial service interface	TxD, RxD
1 x Auxiliary power supply (DC)	8 – 32 V
1 x GND	Reference potential auxiliary supply
3 x Input voltage (DC)	40 – 120 V
3 x GND	Reference potential input voltage
1 x PE	Protective earth input

<sup>1</sup> Other voltage ranges on request

<sup>2</sup> Fundamental of the PAM-block current

<sup>3</sup> See order codes

All rights reserved. All information in this document is based on Celeroton's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton. The information herein is subject to change without notification.

### Connector X1 – In-/output (14 Pin) – CO2 version

4 x RS485 interface	Rx+, Rx-, Tx+, Tx-
2 x Serial service interface	TxD, RxD
1 x Auxiliary power supply (DC)	8 – 32 V
1 x GND	Reference potential auxiliary supply
3 x Input voltage (DC)	40 – 120 V
3 x GND	Reference potential input voltage

### Connector X2 – In-/output (8 Pin)

1 x Temperature measurement input	PT100
1 x GND	Reference potential temperature measurement
3 x Motor phase	PHA, PHB, PHC
3 x PE	Protective earth motor

### Operating range

The operating range of the CC-120-1000 in FCO depends on the fuel cell input voltage as shown in Figure 1. The maximum continuous output power of 1,000 W can be obtained with an input voltage of 60-120 VDC. The absolute maximum power of 1,200 W can be reached during short time overload operation.

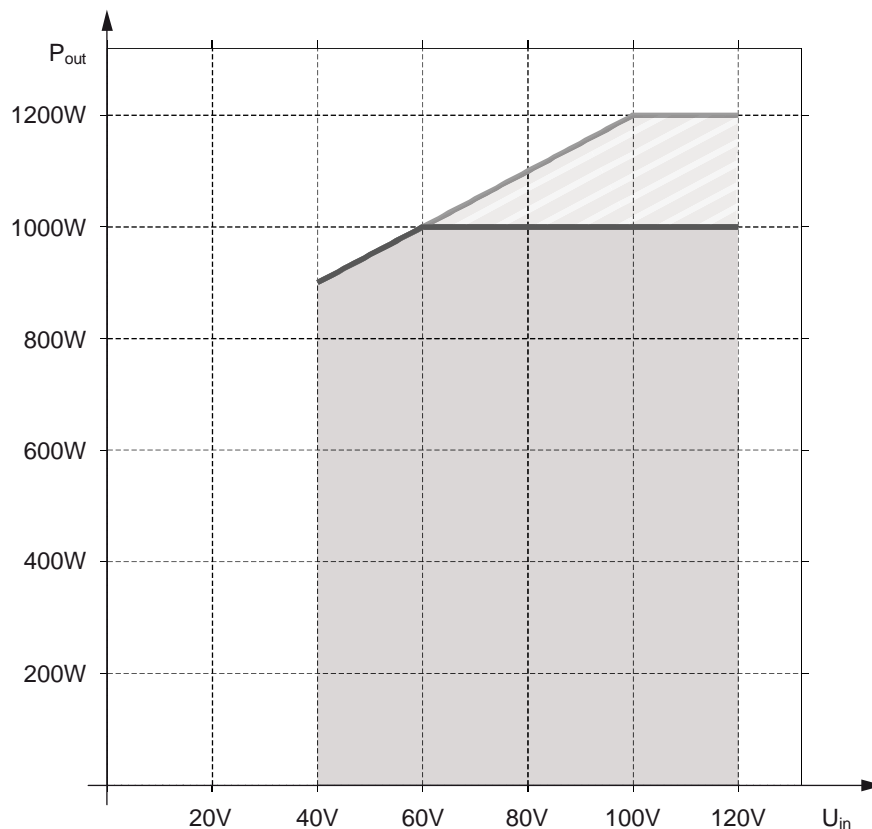


Figure 1: CC-120-1000 operating range. The continuous output power over fuel cell input voltage is shown as solid area. The short time overload operating range is shown as hatched area.

All rights reserved. All information in this document is based on Celeroton's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton. The information herein is subject to change without notification.

Order codes: CC-120-1000.COx


**Communication interfaces COx**

CO1	CAN communication
CO2	RS485 communication

**Ordering information** **Article number**

CC-120-1000.CO1	4030071
CC-120-1000.CO2	4030085
Service cable CC-120-1000.CO1 Low and high voltage supply cable with CAN and USB 1 m (open ends)	4080038
Service cable CC-120-1000.CO2 Low and high voltage supply cable with RS485 and USB 1 m (open ends)	4080045
Supply cable CC-120-1000.CO1 Low and high voltage supply cable with CAN 1 m (open ends)	4080037
Supply cable CC-120-1000.CO2 Low and high voltage supply cable with RS485 1 m (open ends)	4080047

**Drawing in mm [inch]**

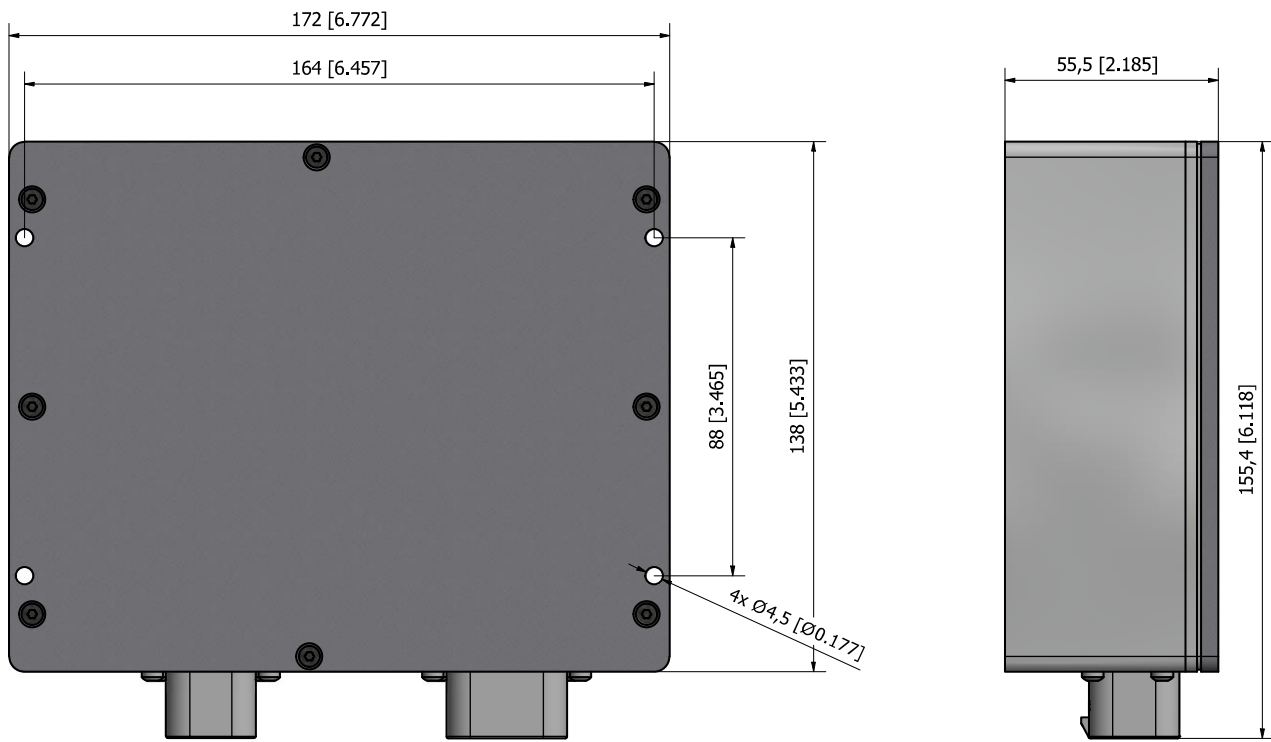

Celeroton AG | Industriestrasse 22 | 8604 Volketswil | Switzerland  
 T: +41 44 250 52 20 | info@celeroton.com

All rights reserved. All information in this document is based on Celeroton's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton. The information herein is subject to change without notification.