

CC-230-3500

Converter for driving permanent-magnet synchronous motors (PMSM) and brushless DC motors (BLDC).

- Sensorless speed control from 7,000 rpm up to 500,000 rpm
- Maximum output power of 3.5 kW
- No output filter required
- User definable setup for different motor parameters
- Torque- or speed-control
- Internal or external braking chopper
- Input with power factor correction (PFC)
- Input voltage 110 – 230 VAC (50 Hz/60 Hz)
- User-friendly PC control software (CelerotonPilot)
- Compressor surge protection functionality



Specifications converter

Input voltage (AC)	110 – 230 VAC (50 Hz/60 Hz)
Maximum output power	3,500 W ¹
Output voltage (Peak value phase-phase)	0 – 360 V
Maximum phase current (PAM-operation)	14.2 Arms/20 A _{peak} ²
Maximum frequency/speed (PAM-operation)	8.3 kHz/500,000 U/min
Operating range	4-Quadrant (with Chopper)
Communication interface	USB; RS232/RS485; CAN
Brake chopper (pulse/continuous)	60 W/30 W
External brake chopper	up to 3,500 W
PC control software	CelerotonPilot
Weight	4.5 kg
Dimensions	267 (317) x 205 x 80 mm
Operating temperature	0 – 40 °C

User interfaces (X4, X5, X6, X7, X8, X9, X10, X11, X12)

Connector X4 – Digital Output 1

4 x digital outputs	0 – 24 V (relay, normally open contacts)
---------------------	--

Connector X5 – Digital Input

4 x digital inputs	0 – 24 V (software adjustable thresholds 0.8 – 24 V)
1 x power supply	24 V, 100 mA

¹ For input voltages higher 200 VAC; 1.8 kW for input power of 100/110 VAC

² Fundamental of the PAM block current

All rights reserved. All information in this document is based on Celeroton's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton. The information herein is subject to change without notification.

Connector X6 – Digital Output 2

4 x rotor position signals (SA, SB, SC, SI)	5 V level
---	-----------

Connector X7 – Analog Output

4 x analog outputs	0 – 10 V
--------------------	----------

Connector X8 – Analog Input

4 x analog inputs	0 – 10 V
1 x power supply	10 V, 100 mA

Connector X9 – Hall Motor

1 x power supply	5 V, 100 mA
3 x digital hall sensor inputs	(open collector), pull up to 5 V

Connector X10 – Encoder Motor

1 x power supply	5 V, 100 mA
3 x differential encoder inputs	5 V level

Connector X11 – Motor Interface

1 x temperature measurement input	Thermocouple type K
1 x temperature measurement input	PTC or NTC


Connector X12 – Safety

1 x power supply	24 V, 100 mA
2 x Safety switching input and interlock	STO – 24 V level

Order codes: CC-230-3500

Ordering information	Article number
CC-230-3500	4030073
Connector set CC-230-3500	4080032

Drawing in mm (inch)

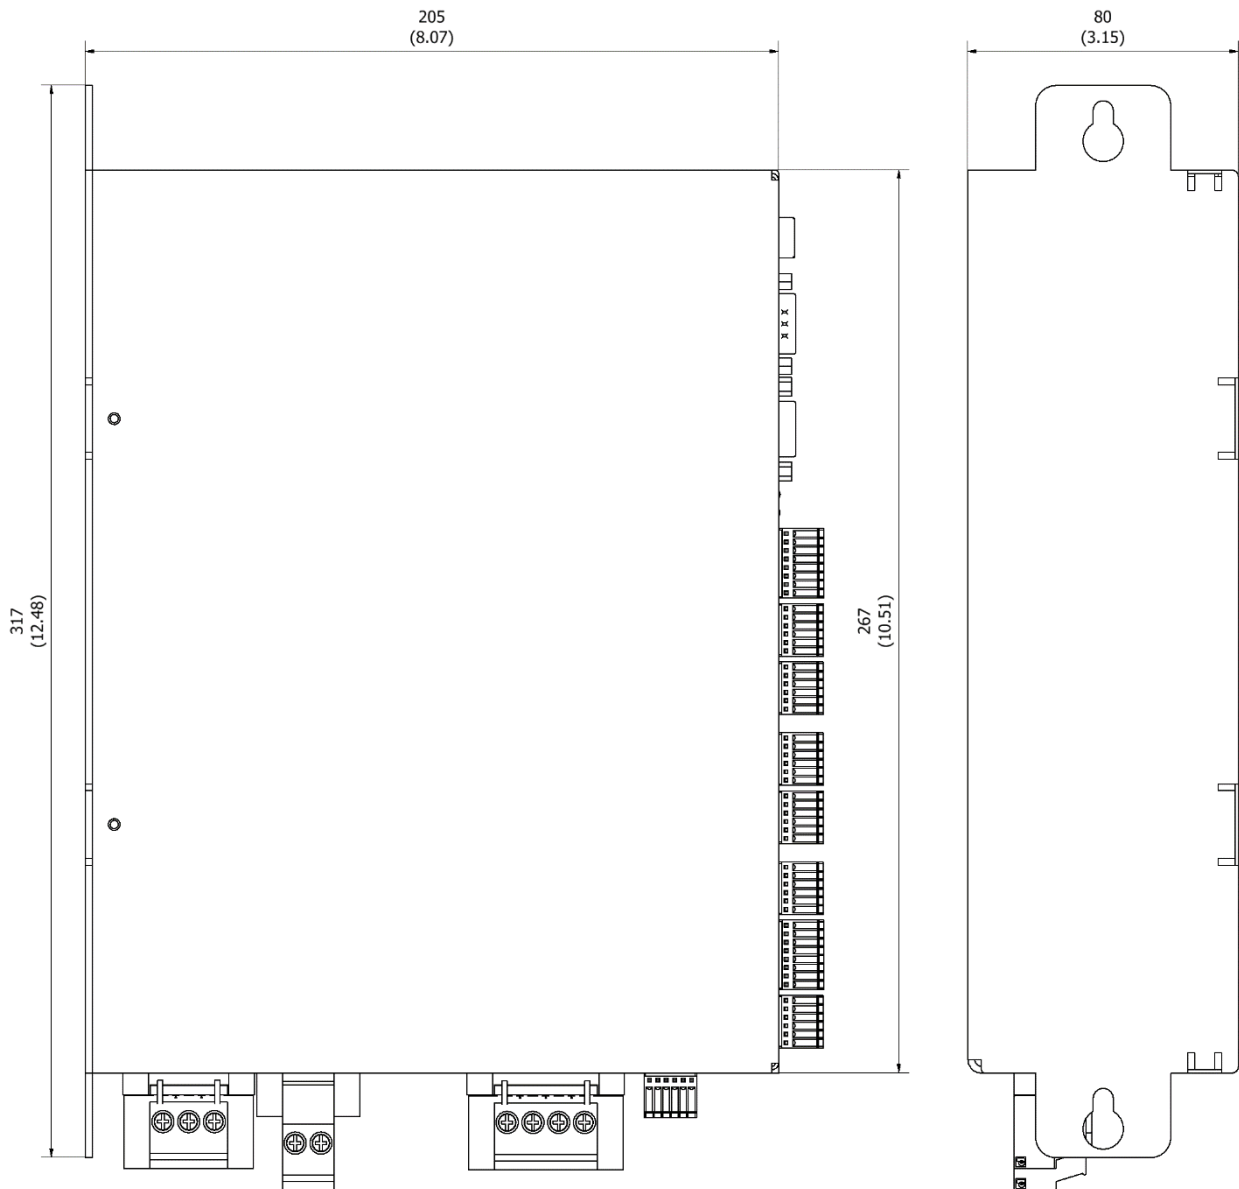

Celeroton AG | Industriestrasse 22 | 8604 Volketswil | Switzerland
 T: +41 44 250 52 20 | F: +41 44 250 52 29 | info@celeroton.com

All rights reserved. All information in this document is based on Celeroton's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton. The information herein is subject to change without notification.